

- Three (3) copies of the drawings must accompany the utility permit application
- Four (4) copies of the drawings must accompany the Interstate utility permit application

Permit Number 03025484
 CONTROL 424 SECTION 05

ENTERED IN COMPUTER FILE
[Signature]
 INITIAL AND DATE

STATE OF LOUISIANA
 DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT
UTILITY PERMIT
 (Required by State Law)
 R.S. 48:381
 Rev 01/06

This permit shall be available at the site where and when work is being done.

Whereas AT&T LOUISIANA
 (Print or type name of applicant)

hereinafter termed applicant, requests a permit for the use and occupancy of the right-of-way of State

Highway No. US-90 in ~~ibesia~~ ST. MARY Parish, located as follows:
 from: A POINT 15312 FEET EAST OF LA HWY 668 Lat: _____ Long: _____
 to: A POINT 1975 FEET WEST OF LA HWY 318 Lat: _____ Long: _____

(in Decimal Degrees, e.g. Lat: -30.459, Long: -91.178)

for the installation, operation and maintenance of the following described project (use additional sheets as necessary):

PLACE A 22GA 200 PR COPPER CABLE PARALLEL TO US 90 FRONTAGE RD FOR APPROXIMATELY 470 FEET. CABLE IS TO BE PLACED BY THE MACHINE TRENCH OR DIRECTIONAL BORE METHOD AT A MINIMUM DEPTH OF 24 INCHES.

Estimated number of times this facility will be accessed each year after construction has been completed, including meter readings: _____

Please read all provisions prior to signing this permit.
Failure to conform to the provisions of this permit shall result in DOTD revoking said permit.
By signing this permit, the applicant acknowledges receiving a copy of all rules and regulations.

Permit is subject to the following conditions (use additional sheets as necessary):

26P91155D

RECOMMENDED FOR APPROVAL:
 (Check box if review required.)

Stanley Richard 9-20-12
 District Permit Specialist / Date

(Signed)
 (Printed or Typed)

Permit must be signed by the owner or lessee of the property.
 Contractor may NOT acquire permit

Tom Diermann AT&T Louisiana
 (Owner)

District Traffic Operations Engineer / Date

District Maintenance Engineer / Date

District Engineer Administrator / Date

(Name of Person Signing Permit)
Thomas Diermann
 (Title)
221 Venture Way Suite B
 (Street or P.O. Box)
Lafayette La 70507
 (City or Town) (State) (Zip Code)
337-279-5047
 (Telephone Number)
td4996@att.com
 (E-mail Address - optional)

Applicant must notify District Permit Specialist

at phone number: _____
 prior to beginning work and after work is completed.

Issue Date: _____

Expiration Date: _____

APPROVED: *[Signature]* 9/20/12
 Headquarters Right-of-Way Permit Engineer / Date

HEADQUARTERS

DISTRICT

PERMITTEE

FIRST: That, the rights and privileges granted herein shall be nonexclusive and shall not be construed to be any broader than those expressly set out in Acts of the Legislature of the State of Louisiana, regardless of the language used in this permit and that any facilities placed on the highway right-of-way shall be placed in accordance with existing laws and the standards of the Department.

SECOND: That, all facilities thereto, after having been erected, shall at all times be subject to inspection and the right is reserved to require such changes, additions, repairs, relocations and removal as may at anytime be considered necessary to permit the relocation, reconstruction, widening and maintaining of the highway and to provide proper and safe protection to life and property on or adjacent to the highway, or in the interest of safety to traffic on the highway and that the cost of making such changes, additions, repairs and relocations shall be borne by the applicant, and that all of the cost of the work to be accomplished under this permit shall be borne by the permittee who agrees to hold the Department harmless therefor.

THIRD: That, the proposed facilities or their operation or their maintenance shall not unreasonably interfere with the facilities or the operation or maintenance of the facilities of other persons, firms or corporations previously issued permits of use and occupancy, and the proposed facilities shall not be dangerous to persons or property using or occupying the highway or using facilities constructed under previously granted permits of use and occupancy; and that the Department's records of prior permits are available, it being the duty of the applicant to determine the existence and location of all facilities within the highway right of way.

FOURTH: That, installations within the highway right-of-way shall be in accordance with applicable provisions contained in the following: AASHTO Guide for Accommodating Utilities within Highway Right of Way, Code of Federal Regulations 23 (CFR 23), National Electrical Safety Code C2, 1996 Federal Telecommunications Act. Those facilities not included in the above mentioned documents shall be in accordance with accepted practice. Where standards of the Department exceed those of the above cited codes, the standards of the Department shall apply. The Department reserves the right to modify its policies as may be required if conditions warrant.

FIFTH: That, data relative to the proposed location, relocation and design of fixtures or appurtenances as may be required by the Department shall be furnished to the Department by the applicant free of cost, and that the applicant shall make any and all changes or additions necessary to make the proposed facilities thereto satisfactory to the Department.

SIXTH: That, cutting and trimming of trees, shrubs, etc., shall be in accordance with the Department's EDMS IV.2.1.6 and Vegetation Manual, as revised.

SEVENTH: That, the applicant agrees to defend, indemnify, and hold harmless the Department and its duly appointed agents and employees from and against any and all claims, suits, liabilities, losses, damages, costs or expenses, including attorneys' fees sustained by reason of the exercise of this permit, whether or not the same may have been caused by the negligence of the Department, its agents or employees, provided, however, that the provisions of this last clause (whether or not the same may have been caused by the negligence of the Department, its agents or employees) shall not apply to any personal injury or property damage caused by the sole negligence of the Department, its agents or employees, unless such sole negligence shall consist or shall have consisted entirely and only of negligence in the granting of a project permit or project permits.

EIGHTH: That, the applicant is the owner of the facility for which a permit is requested, and is responsible for maintenance of such: and any permit granted by the Department is granted only insofar as the Department had the power and right to grant the same.

NINTH: That, any permit granted by the Department is subject to revocation at any time.

TENTH: That, signing for warning and protection of traffic in instances where workmen, equipment or materials are in close proximity to the roadway surfacing, shall be in accordance with requirements contained in the Department's Manual on Uniform Traffic Control Devices. No vehicles, equipment and/or materials shall operate from, or be parked, stored or stock piled on any highway, median, or in an area extending from the outer edge of the shoulder of the highway on one side to the outer edge of the shoulder of the highway on the opposite side or in the median of any divided highway.

ELEVENTH: That, all provisions and standards contained herein relative to the installation of utilities shall apply to future operation, service and maintenance of utilities.

TWELFTH: That, drainage in highway side and cross ditches must be maintained at all times. The entire highway right of way affected by work under a permit must be restored to as good a condition as existed prior to beginning work to the complete satisfaction of the Department's R/W Permit Engineer.

THIRTEENTH: Any non-metallic or non-conductive underground facility must be installed with a non-corrosive metallic wire or tape placed directly over and on the center of the facility for its entire length within highway right-of-way. Wire or tape must be connected to all facilities.

FOURTEENTH: Prior to performing any excavations, the applicant is required to call Louisiana One Call. If installing any underground facilities such as cable or conduits, the applicant must be a member of Louisiana One Call.

STANDARDS FOR THE INSTALLATION OF PIPELINES ON STATE HIGHWAYS

A. GENERAL

- (1) All materials and workmanship shall conform to the requirements of the applicable industry code and to Department specifications.
- (2) All safety precautions for the protection of the traveling public must be observed. Undue delay to traffic will not be tolerated.
- (3) All excavations within the limits of the right-of-way shall be backfilled and tamped in six inch layers to the density of the adjacent undisturbed soil. Where sod is removed or destroyed, it shall be replaced. Where it is necessary to make excavations in the shoulder, the top six inches of backfill shall be sand-clay gravel or equivalent. Where existing spoil material is, at the discretion of the Department, unsuitable for backfill, select material shall be furnished in lieu thereof and the existing material disposed of by approved methods.
- (4) Protruding valves and other above ground appurtenances shall not be installed at any point within the right of way of the highway except for vents, markers, etc., which may be installed at the right-of-way line, unless specifically approved herein.

B. PARALLEL TO THE HIGHWAY (All provisions of general standards to apply.)

- (1) Pipelines paralleling the highway: (a) shall occupy the last few feet of the right-of-way back of the ditch except where upon showing of actual necessity a permit is issued for another location; (b) shall have a minimum earth cover of twenty-four (24) inches; (c) shall have a minimum clearance of twenty-four (24) inches below existing or proposed drainage structures, where possible.

C. CROSSING THE HIGHWAY (All provisions of general standards apply.)

- (1) Uncased pipelines may be permitted, provided the conditions outlined in E.D.S.M. IV 2.1.9 are met.
- (2) If the permittee elects to use casing, it must extend from right of way to right-of-way, and be properly vented and marked at or beyond the right of way line.
- (3) For cased pipelines, the casing shall have at least four (4) feet of cover below the roadway and two (2) feet of cover below ditches or drainage structures. Uncased pipelines shall have at least five (5) feet and three (3) feet of cover respectively.
- (4) Crossings shall be made at as nearly right angles to the highway as possible. No existing drainage structure under the highway may be used for this purpose.
- (5) Construction methods used shall be in accordance with the following requirements:
 - A. Cutting the surface or tunneling under it is specifically prohibited.
 - B. Installation shall be made either by boring or jacking under and through the highway at least from ditch bottom to ditch bottom. In the absence of ditches, or along sections of highway with curb or gutter, boring or jacking shall extend beyond the outside edge of the traveled way to a point at least equal to three (3) times the vertical difference between the elevation of the roadway surfacing and the elevation of the top of the cable. Where width of right-of-way is insufficient to enable compliance with this requirement or where it is necessary to make a connection to an existing parallel facility which precludes compliance, the distance shall be to the right of way line or to the parallel facility. Any voids or overbreaks resulting from this shall be backfilled with grout consisting of a cement mortar or a slurry of fine sand or clay, as conditions require. Excavating an open ditch to the edge of the pavement and boring and jacking the remainder of the distance is prohibited. Jacking and boring shall be done in accordance with Section 728 of the La. Standard Specifications for Roads and Bridges, latest edition.

HEADQUARTERS

DISTRICT

PERMITTEE

D. REMOVAL AND ABANDONMENT OF UTILITY FACILITIES

- (1) All facilities installed within state highway right-of-way shall be removed and disposed of by their owner as soon as they stop serving a useful purpose. Facilities may be abandoned under the following circumstances.
- A. Pipelines and casings crossing highways or other hard surfaces may be abandoned in place, with the recommendation of the district utility and permit specialist and the project engineer, and with the approval of the headquarters utility and permit engineer.
 - B. Pipe lines and casings installed along highways, may be abandoned in place, with the recommendation of the district utility and permit specialist and the project engineer, and with the approval of the headquarters utility and permit engineer, provided that they are less than 6 inches in diameter, or that they are buried with more than 8 feet of cover.
 - C. Electrical and communication facilities installed within a casing, and crossing under highways or other hard surfaces may be abandoned in place with the recommendation of the district utility and permit specialist and the project engineer, and with the approval of the headquarters utility and permit engineer, provided that the cable is removed from the casing.
 - D. Uncased cables crossing under highways or other hard surfaces may be abandoned in place provided that they are removed to a point as near to the edge of the highway as feasible.
 - E. Electrical and communication cables installed along highways may be abandoned in place, with the recommendation of the district utility and permit specialist and the project engineer, and with the approval of the headquarters utility and permit engineer, provided that they are less than 4 inches in diameter, or that they are buried with more than 8 feet of cover.
 - F. All above ground facilities installed along state highways shall be removed and disposed of by their owner as soon as they stop serving a useful purpose.
 - G. Facilities that are located so that their removal would be likely to result in damage to the highway, or to other facilities, may be abandoned in place, with the recommendation of the district utility and permit specialist and the project engineer, and with the approval of the headquarters utility and permit engineer. The procedure for abandoning these facilities will be specified on a case-by-case basis; however, in general, sections shall be removed where possible, and all remaining lines shall be filled with grout.
- (2) Where it is not possible nor feasible to remove pipelines and/or casings under existing highways, such pipelines and/or casings may be abandoned in place provided removals shall be accomplished by the owner, as near to the highway on each side as possible and in all cases, beyond existing ditches to right-of-way lines, and further provided that all pipelines and/or casings abandoned under the highway shall be abandoned in accordance with D.O.T. Title 49 (i.e., pipelines are purged, capped, and filled with grout; note that when highway construction will remove the line in the near future, the DOTD's project engineer may approve the use of water in place of grout).
- (3) Pipelines and cables shall be removed from abandoned casings where possible.
- (4) In all cases the highway right-of-way shall be repaired, at the permittee's expense, to match DOTD standards. An approved backfill material shall be used to fill in any trenches or low areas, and shall be compacted to the same density as the surrounding soil. Any desirable trees or shrubs that are damaged shall be replaced, and any other damages (i.e. to subsurface drainage, traffic signs, etc.) shall be repaired.
- (5) Companies who fail to comply with this by leaving their facilities within highway right-of-way after they are no longer used, or by not repairing the right-of-way after removing their facilities, shall not receive any permits until the situation is rectified.
- (6) In cases where the DOTD decides that it is necessary to remove a facility and/or to repair highway right-of-way damaged by a utility or the utility's facility, the company shall be invoiced for costs to the DOTD for removing abandoned facilities, or for repairing damaged right-of-way. Unpaid invoices shall be referred to DOTD's accounting section for further action.
- (7) Note that a recommendation for abandonment by the project engineer is required only on construction projects. The district construction engineer should be consulted by the district utility and permit specialist when an abandonment may cause a potential problem with future construction. The district maintenance engineer should be consulted by the district utility and permit specialist when an abandonment may cause a potential maintenance problem.
- (8) The owner of the abandoned facilities shall maintain full responsibility for any future problems caused by the facilities, and shall remove the facilities upon receiving a written request from the DOTD. The cost of removing these facilities shall be borne by the owner, and the DOTD shall assume no liability for this cost.



STANDARDS FOR THE INSTALLATION OF SUPPLY AND COMMUNICATION LINES ON STATE HIGHWAYS

- A. All pole lines shall occupy the last few feet of the right-of-way behind the ditch but shall be no further from the right-of-way line than one-half of the width of the cross-arms plus one foot, except where upon a showing of actual necessity a permit is issued for another location.
- B. A minimum vertical clearance of twenty (20) feet shall be maintained between the traveled surface of the highway and any aerial installation. In no case shall the vertical clearance for an overhead utility line be less than the clearance required by the National Electrical Safety Code. A minimum clearance of sixteen (16) feet shall be maintained between existing ground elevation and any aerial installation when such installation is within highway right-of-way but does not cross the traveled surface of a highway.
- C. Where supply and/or communication lines are placed underground, the standards for pipelines shall govern. Underground electric facilities must have at least four (4) feet of cover and must be encased when crossing a highway. These facilities must also be adequately marked by appropriate signs at specified locations.

HEADQUARTERS

DISTRICT

PERMITTEE

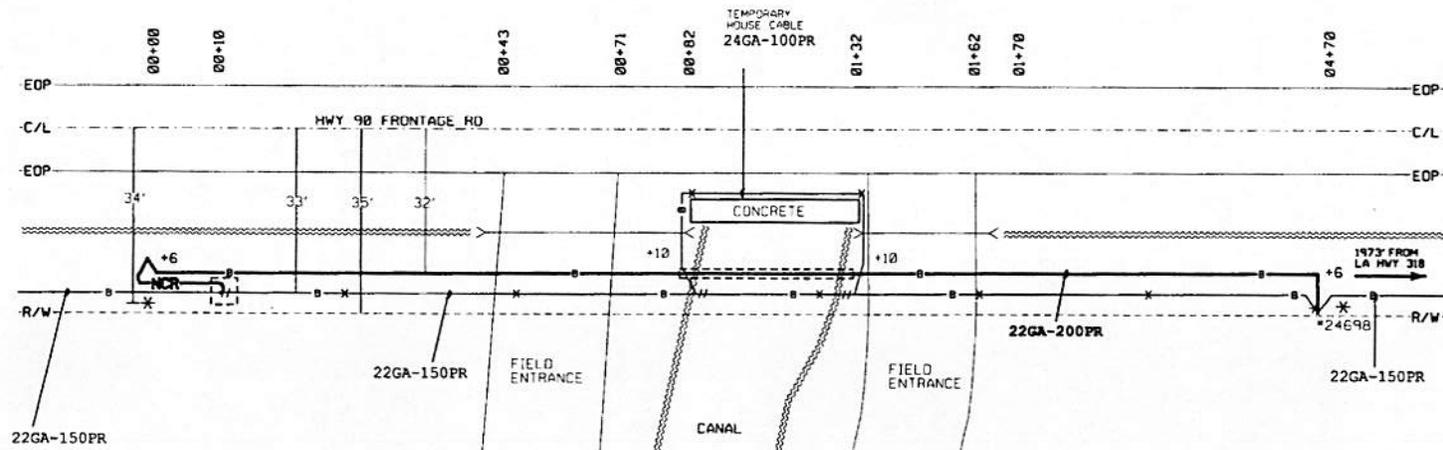

ATTSE	
PROPOSED TELEPHONE FACILITIES ON RIGHT OF WAY OF	
HWY 90	
Exchange:	337276
Designer:	Diermann, Thomas, A
Phone:	337-279-5047
Authorizations:	26P90550
Sheet:	02 of 03