

**NOTES**


FOR ADDITIONAL INFORMATION ON GUARD RAIL, SEE STD. PLAN GR-200 & GR-202.

ALL WORK AND MATERIALS REQ'D. TO INSTALL GUARD RAIL ON BOX CULVERTS SHALL BE PAID FOR UNDER ITEM 704-01-01000 GUARD RAIL (SINGLE THRIE BEAM) (3'-1 1/2\"/>

GUARD RAIL SPLICES SHALL BE MADE AT POST LOCATIONS ONLY.

- USE 7/8"Ø MECHANICAL SYSTEM AS LISTED ON DOTD APPROVED MATERIALS LIST, PRODUCT CATEGORY "CONCRETE ANCHOR SYSTEMS." PLACE BOLT IN HOLES IMMEDIATELY AND WAIT FOR MANUFACTURERS CURE TIME.

ALL STRUCTURAL STEEL SHALL BE ASTM A-36 AND GALVANIZED. ALL 5/8"Ø BOLTS SHALL BE ASTM A307.

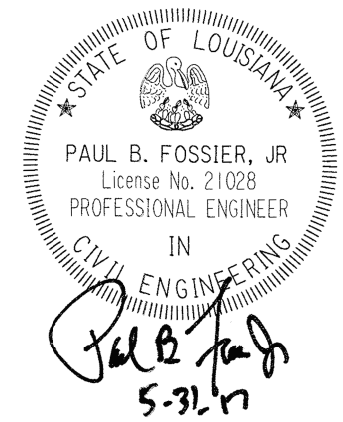

	<b>SIDE MOUNT GUARD RAIL</b> (FOR BOX CULVERT)		NO.	DATE	REVISION OR CHANGE ORDER DESCRIPTION	BY	DESIGNED CHECKED	P. FOSSIER C. GAUDRY	PARISH
			STANDARD DETAIL	BD.2.6.4.1.01	4-8-16	GUARDRAIL HEIGHT, ANCHOR BOLT NOTE AND BASE PLATE	P. F.	REVIEWED	K. BRAUNER

SHEET NUMBER