DESIGNED P. FOSSIER PARISH CHECKED C. GAUDRY CONTROL
DETAILED J. BENTON CONTROL
CHECKED P. FOSSIER SECTION
REVIEWER K. BRAUNER STREET
SERIES ##

GUARDRAIL HEIGHT, ANCHOR BOLT NOTE BASE PLATE

BRIDGE AND STRUCTURAL DESIGN

NOTES


FOR ADDITIONAL INFORMATION ON GUARD RAIL, SEE STD. PLAN GR-200 & GR-202.

ALL WORK AND MATERIALS REQ'D. TO INSTALL GUARD RAIL ON BOX CULVERTS SHALL BE PAID FOR UNDER ITEM 704-01-01000 GUARD RAIL (SINGLE THRIE BEAM) (3'-1/2" POST SPACING).

GUARD RAIL SPLICES SHALL BE MADE AT POST LOCATIONS ONLY.

 USE % # MECHANICAL SYSTEM AS LISTED ON DOTD APPROVED MATERIALS LIST, PRODUCT CATEGORY "CONCRETE ANCHOR SYSTEMS." PLACE BOLT IN HOLES IMMEDIATELY AND WAIT FOR MANUFACTURERS CURE TIME.

ALL STRUCTURAL STEEL SHALL BE ASTM A-36 AND GALVANIZED. ALL $\frac{5}{8}$ BOLTS SHALL BE ASTM A307.

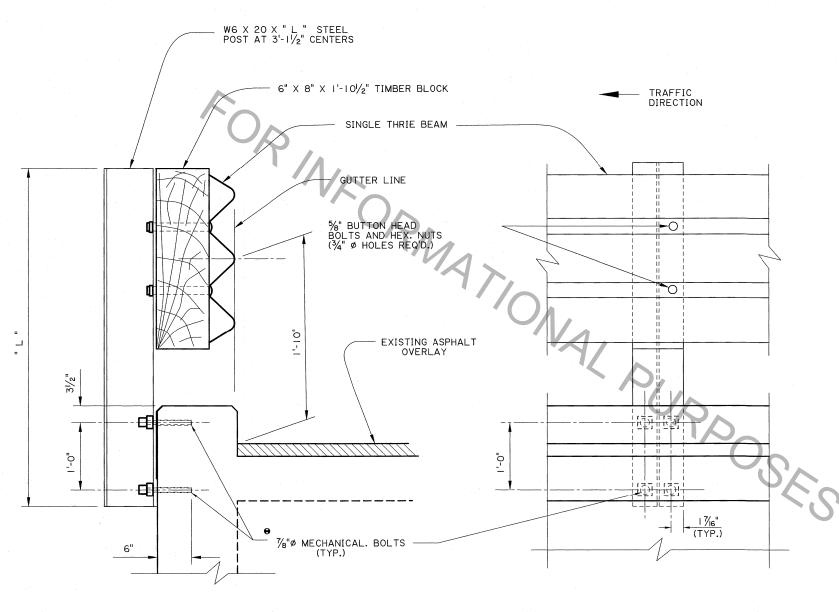

SECTION THRU RAIL

VIEW FROM ROADWAY





GUARD RAIL CULVERTS)