FOR ADDITIONAL INFORMATION ON GUARD RAIL, SEE STANDARD PLANS FOR HIGHWAY GUARD RAIL (MASH).

ALL WORK AND MATERIALS REQ'D. TO INSTALL GUARD RAIL ON THIS TYPE STRUCTURE SHALL BE PAID FOR UNDER ITEM 704-01-01020 GUARD RAIL (SINGLE THRIE BEAM).

ALTHOUGH ITEM 704-01-01020 CALLS FOR 6'-3" POST SPACING, THE NEW POST ON THIS TYPE STRUCTURE SHALL BE PLACED IN THE SAME LOCATION AS THE EXISTING ONES.

GUARD RAIL SPLICES SHALL BE MADE AT POST LOCATIONS ONLY.

USE 7_8 " MECHANICAL SYSTEM AS LISTED ON APPROVED MATERIALS LIST, PRODUCT CATEGORY "CONCRETE ANCHOR SYSTEMS."

ALL STRUCTURAL STEEL SHALL BE ASTM A-36 AND GALVANIZED. ALL 5_8 $^{\circ}$ $^{\circ}$ BOLTS SHALL BE ASTM A307.

N RAIL (MASH)


9/28/17



SIDE MOUNTED GUARD FOR BRIDGES
FOR USE WITH HIGHWAY GUARD RAIL
BD.2.6.5.2.10

g.cj -> g. 국



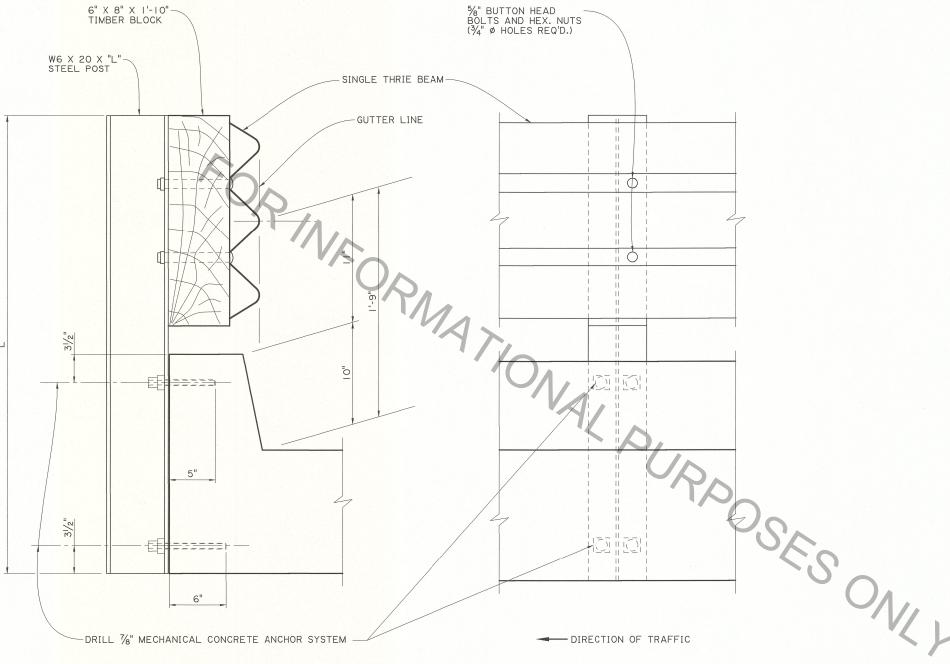

SECTION THRU RAIL

VIEW FROM ROADWAY