GENERAL STATIC MAP FOR FOUNDATION REQUIREMENTS SHOWN HERE.
SEE **http://goo.gl/QHv2o3** FOR LOCATION SPECIFIC CLASSIFICATION.
ALTERNATIVE: LADOTD WEBSITE/HOME/INSIDE LADOTD/DIVISIONS/OPERATIONS /TRAFFIC SERVICES/TRAFFIC OPERATIONS/APPROVED PRODUCT LIST/TOAPL 165.

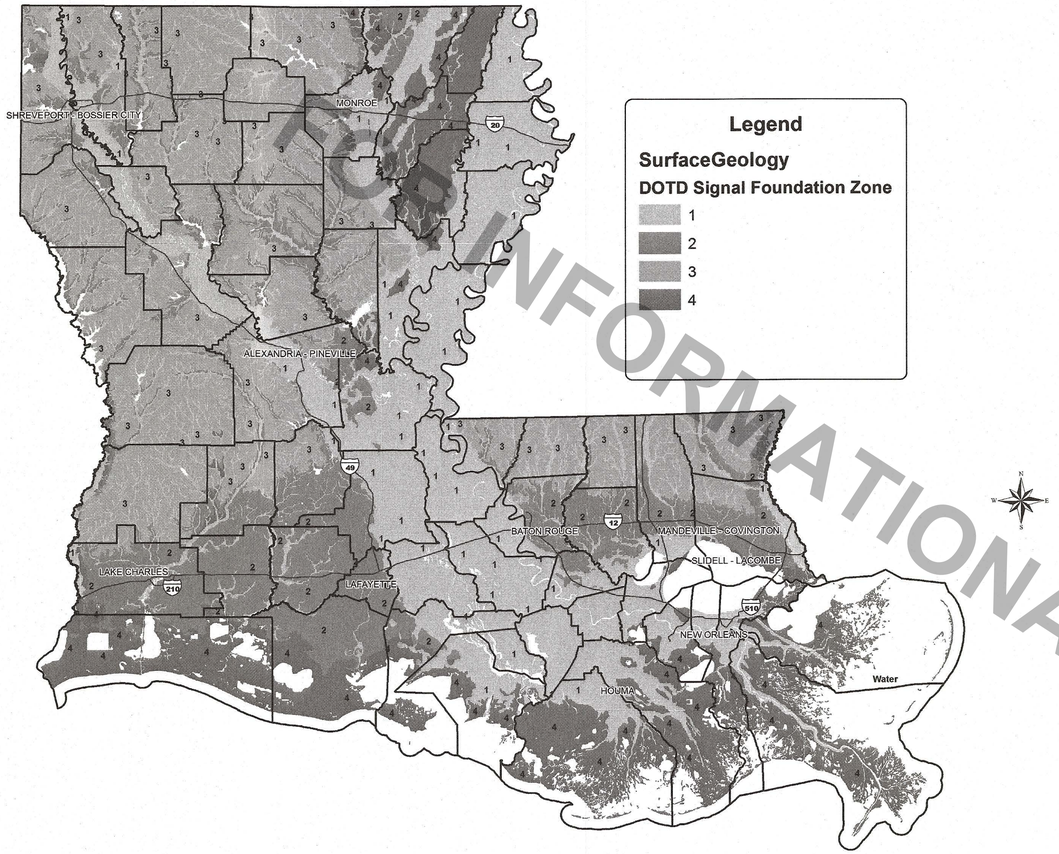

FOUNDATION SIZE ZONING:

1. FOUNDATION ZONES ARE BASED ON THE 1984 GEOLOGICAL MAP OF LOUISIANA PUBLISHED BY THE LOUISIANA GEOLOGICAL SURVEY. LOCAL GEOLOGICAL VARIATIONS ARE LIKELY DUE TO HUMAN ACTIVITIES OR NATURAL EVENTS.
2. THE ZONING MAP IS INTENDED TO ASSIST IN SIZING FOUNDATION FOR SELECTED SIGNAL POLES AND SHOULD NOT BE VIEWED AS A SUBSTITUTE OF ENGINEERING JUDGMENT OR PROPER DESIGN.
3. SOME SOILS SUCH AS GRAVEL OR CEMENTED SOILS MAY NOT BE AMENABLE TO THE CONVENTIONAL DRILLED SHAFT CONSTRUCTION. EXERCISE CAUTION AND SEEK CONFIRMATION OF THE SOIL CONDITIONS DURING DESIGN AND/OR DURING SHAFT EXCAVATION.

ZONE 1 - ALLUVIAL SOILS FORMED BY THE RED RIVER, THE OUACHITA RIVER, THE ATCHAFALAYA RIVER, AND THE MISSISSIPPI RIVER. ASSUMED AVERAGE SOIL SHEAR STRENGTH IS AT LEAST 250 POUNDS PER SQUARE FOOT (PSF).

ZONE 2 - PLEISTOCENE AGE PRAIRIE TERRACES DEPOSITS. ASSUMED AVERAGE SOIL SHEAR STRENGTH IS AT LEAST 500 PSF.

ZONE 3 – PLEISTOCENE AGE OR OLDER DEPOSITS OTHER THAN ZONE 2. ASSUMED AVERAGED SHEAR STRENGTH IS AT LEAST 1,000 PSF.

ZONE 4 - MOSTLY COASTAL MARSH AND SAND/GRAVEL DEPOSITS. SPECIAL DESIGN IS REQUIRED FOR THE SIGNAL POLE WITHIN THIS ZONE.

CONSTRUCTION NOTES:

1. IF GROUNDWATER IS ENCOUNTERED DURING FOUNDATION EXCAVATION AND NO CAVE IN IS OBSERVED, THE GROUNDWATER SHOULD BE PUMPED OUT PRIOR TO STEEL CAGE PLACEMENT. THE WATER REMAINS IN THE EXCAVATION SHOULD BE NO MORE THAN ½ INCH.
2. IF GROUNDWATER IS ENCOUNTERED DURING FOUNDATION EXCAVATION AND CAVE IN IS OBSERVED, THE EXCAVATION SHOULD BE CEASED. CONTACT THE PROJECT ENGINEER IMMEDIATELY. SHOULD THE CAVING IS EXCESSIVE, BACKFILL THE EXCAVATION IMMEDIATELY.
3. FREE FALL CONCRETE IS ALLOWED FOR DRY HOLES ONLY. THE CONCRETE SHALL BE PLACED WITH A HOPPER OR A TREMIE. WHEN FREE FALL METHOD IS USED, CONTROL THE CONCRETE TO FALL VERTICALLY WITHOUT CONTACTING SHAFT WALL OR STEEL CAGE TO PREVENT SEGREGATION.
4. CONCRETE PLACEMENT WITH A TREMIE IS REQUIRED IF EXCESSIVE GROUNDWATER (MORE THAN 6 INCHES ACCUMULATION) IS ENCOUNTERED.
   WHEN THE SOIL CONDITIONS ARE SUSPECTED TO BE DIFFERENT THAN THOSE DESCRIBED IN THE FOUNDATION SIZE ZONING, CONTACT THE PROJECT ENGINEER IMMEDIATELY TO EVALUATE THE SUITABILITY OF THE FOUNDATION DESIGN.

STATE OF LOUISIANA
LEI Q. WANG
License No. 33365
PROFESSIONAL ENGINEER
2-19-2015

FOR INFORMATIONAL PURPOSES ONLY

DESIGNED	S. MCCARROLL	PARISH	
CHECKED	D. LORIO		
DETAILED	S. MCCARROLL	FEDERAL PROJECT	
CHECKED	L. WANG		
DATE	2/16/2015	STATE PROJECT	
SHEET	7 OF 14		

SHEET NUMBER

NO.	DATE	REVISION DESCRIPTION	BY

TRAFFIC SIGNAL STANDARD DETAILS
55' SINGLE, 50'X35' DUAL, AND OVER MAST ARM DETAIL FOUNDATION DETAILS POLE FOUNDATION DETAILS
TSD-06

TRAFFIC ENGINEERING

W:\Traffic Signals\Standards\TSD's\2015 TSDs\DGN files\TSD06,03.20.2014.dgn 2/16/2015 14:21